


ATRS0002 DRY CONTACTS



Report 0-1 statuses and control relays.



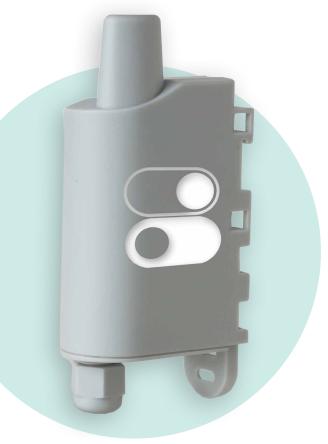





ACT

 Activate or restart machines and equipment items remotely



ALERT

- Provide feedback about faults, level alerts
- Detect an intruder's presence, or detect an action
- · Control access and break-ins



- Count the number of changes in status





FUNCTION

Dry Contact | 0-1 status

BENEFITS

- · 4 configurable inputs/outputs
- · Locally and remotely configurable
- · Low power consumption for optimal autonomy
- Develop new preventive maintenance services, alerts services, or analysis services.

SICE Telecomunicazioni

Via Tazio Nuvolari 53 - 55061 Carraia - Lucca, Italy Tel: (+39) 0583 980787 www.sicetelecom.it | info@sicetelecom.it



PRODUCT USES



Monitoring of the occupancy of the rooms in your building in order to optimize the management of the services.



Broadcast information instantly on a malfunction of an escalator, an elevator...

TECHNICAL SPECIFICATIONS

Periodic modes or event-based modes

· Replaceable battery

- Dimensions: 105 x 50 x 27 mm

· Box: IP67 (IP68 on request)

· Integrated fastening system: DIN rail, tube,

wall, flange

- Zone: sigfox: RC1 / LoRaWAN: EU863-870 /

W-Mbus: 868

Operating temperature range: -25°C / +70°C

· Weight: 90g

· Standards: Directive 2014/53/EU (RED)

 $\boldsymbol{\cdot}$ Product error alert, configuration error, low

battery

· Configurable Life Screen

SICE Telecomunicazioni

Via Tazio Nuvolari 53 - 55061 Carraia - Lucca, Italy Tel: (+39) 0583 980787

www.sicetelecom.it | info@sicetelecom.it